


UNDER DECK MOUNTING
(NO RIDGE BOARD)

- FINIAL
- THREADED BRASS ROD FROM FINIAL
- BRASS COUPLING
- 3/4" HOLE THROUGH ROOF
- THREADED BRASS ROD
- MIN 8" FINIAL BASE
(TO MATCH ROOF PITCH)
- 1/2" STAINLESS NUT AND WASHER
CLAMPS FINIAL TO ROOF.
CAUTION: DO NOT OVER TIGHTEN.

FRAMING (BY INSTALLER)
BORE HOLE THROUGH FRAMING
FOR THREADED ROD.

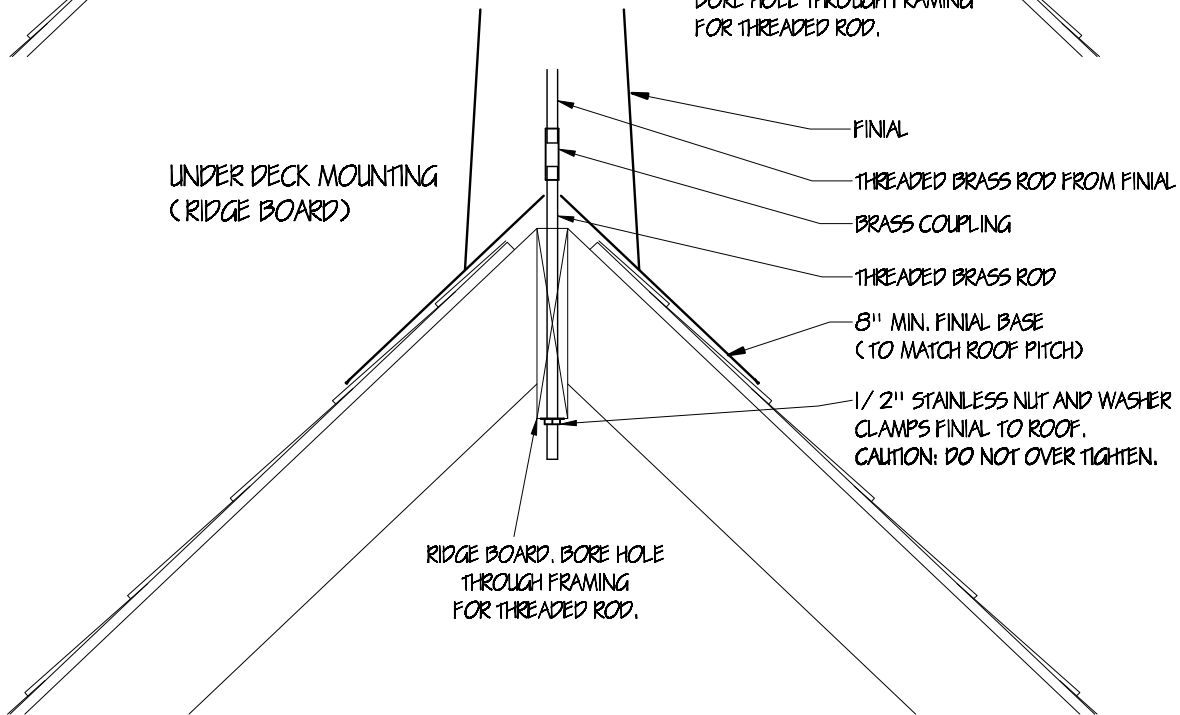


UNDER DECK MOUNTING
(RIDGE BOARD)

- FINIAL
- THREADED BRASS ROD FROM FINIAL
- BRASS COUPLING
- THREADED BRASS ROD
- 8" MIN. FINIAL BASE
(TO MATCH ROOF PITCH)
- 1/2" STAINLESS NUT AND WASHER
CLAMPS FINIAL TO ROOF.
CAUTION: DO NOT OVER TIGHTEN.

RIDGE BOARD. BORE HOLE
THROUGH FRAMING
FOR THREADED ROD.

SURFACE MOUNT
(FINIALS < 3' ONLY)

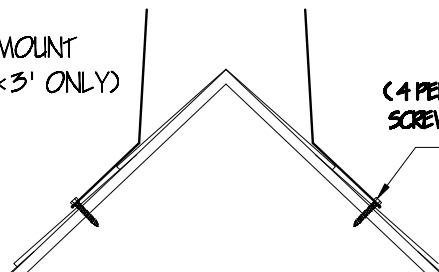

(4 PER FINIAL) #10 1 1/2" STAINLESS
SCREW THROUGH HEM EQUALLY SPACED
(1/4" FROM EDGE)

OLD WORLD RECOMMENDS UNDER DECK
MOUNTING FOR ALL INSTALLATIONS FOR
MAXIMUM WIND RESISTANCE.



OLD WORLD DISTRIBUTORS, INC.

Part No.: FINIAL INSTALLATION METHODS

Available Materials:

- 1/2" Threaded Brass Rod
- 1/2" Stainless Steel Washer
- 1/2" Stainless Steel Nut
- #10 x 1 1/2" Stainless Steel Screws

Notes: